




Micro D Connectors – Metal Shell

High-density & high-reliability



Power Pin+
Signal contacts

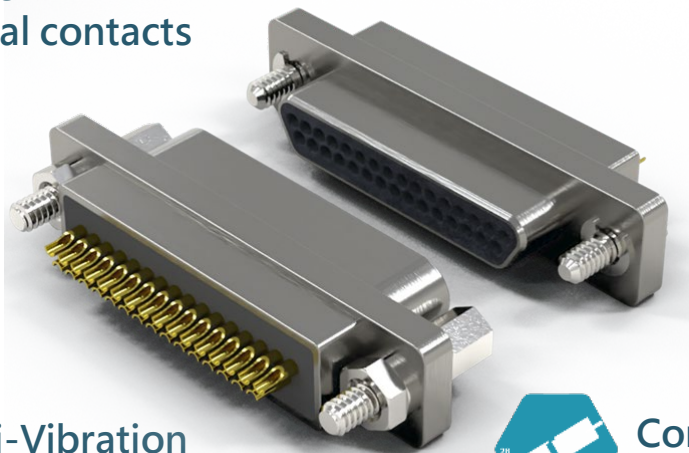

Anti-Vibration



Connector+ Cable
Total Solution

Features :

- Inter-face compatible with MIL-DTL-83513
- High-density and high-reliability

Type :

- Receptacle: PC Tail

Material	Electrical	Mechanical	Environmental
- Insulator : Thermoplastic - Contact : Copper Alloy	- Rated Current : 3A - Insulatard Resistance: 500V DC, >5000MΩ min	- Durability : 2000 cycles - Vibration : 20g - Shock : 50g	- Salt Spray : 48H - Operating Temperature : (-55°C to +130°C)

Part Number & Spec. Description

Description	NO.	Shell	Connector Style	Interface	Wire Gauge	Termination Style
Micro-D Connectors receptacle 100pins	AR0114 1220	Stainless, Passivated	receptacle	100pin	-	Female

Drawing

